


エルボ(S0)

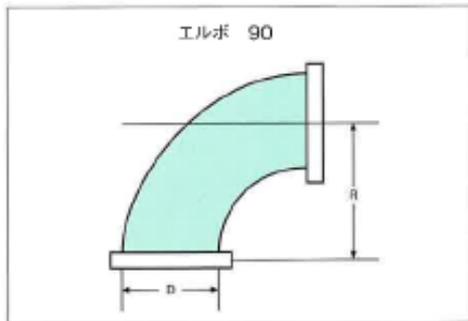

呼径 A (B)	寸法			90°	45°
	外径 (D)	肉厚	曲り半径 (R)	重量	重量
25A (1B)	34.0	3.2	38.1	0.34	0.20
40A (1 1/2B)	48.6	3.5	57.2	0.45	0.28
50A (2B)	60.5	3.8	76.2	0.77	0.45
65A (2 1/2B)	76.3	4.2	95.3	1.32	0.76
80A (3B)	89.1	4.2	114.3	1.74	1.18
100A (4B)	114.3	4.5	152.4	3.29	1.84
125A (5B)	139.8	4.5	190.5	4.95	2.71
150A (6B)	165.2	5.0	228.6	7.71	4.16
200A (8B)	216.3	5.8	304.8	15.7	8.46
250A (10B)	267.4	6.6	381.0	26.9	14.2
300A (12B)	318.5	6.9	457.2	40.0	20.8
350A (14B)	355.6	7.9	533.4	59.0	31.0
400A (16B)	406.4	7.9	609.6	79.0	42.0